

INKA214AP1

Active Clamp
Silicon N-channel MOSFET

DESCRIPTION

INKA214AP1 is a Silicon N-channel Active Clamp MOSFET. The built in clamp diode connected between drain and gate protects the MOS-FET from the counter electromotive force in switching drive of the inductance load.

FEATURE


- The built in clamp diode connected between drain and gate.
- Built in bias resistor enables reduction of parts count.
- Drive voltage 4V

APPLICATION

Motor, Solenoid drive etc

OUTLINE DRAWING

Unit: mm

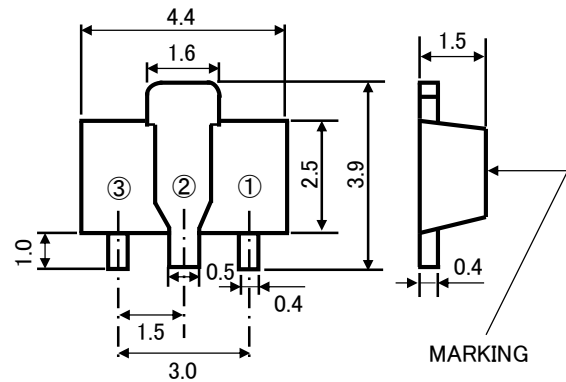

TERMINAL CONNECTER

- ①: GATE
②: DRAIN
③: SOURCE

JEITA: SC-62

JEDEC: SOT-89


MAXIMUM RATINGS (Ta=25°C)

Symbol	Parameter	Rating	Unit
V _{GSS}	Gate-Source Voltage	10	V
I _D	Drain Current(DC)	2(※1)	A
I _{DP}	Drain current(Pulse)	6(※2)	A
P _D	Total Power Dissipation	0.75(※1)	W
T _{ch}	Channel Temperature	+150	°C
T _{stg}	Storage temperature	-55~+150	°C


※1 package mounted on 19mm × 45mm × 1mm glass-epoxy substrate

※2 Pw ≤ 1ms, Duty cycle ≤ 1%

EQUIVALENT CIRCUIT



MARKING









ELECTRICAL CHARACTERISTICS (Ta=25°C)

Parameter	Symbol	Test Condition	Limit			Unit
			MIN	TYP	MAX	
Drain-Source Breakdown Voltage	V _{(BR)DSS}	I _D =10mA, V _{GS} =0V	38	-	62	V
Gate-Source Leak current	I _{GSS}	V _{GS} =±5V, V _{DS} =0V	-	-	±100	μA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =30V, V _{GS} =0V	-	-	1.0	μA
Gate Threshold Voltage	V _{th}	I _D =1mA, V _{DS} =V _{GS}	1.0	-	2.5	V
Forward Transfer Admittance	Y _{fs}	V _{DS} =10V, I _D =1A	-	2	-	S
Static Drain-Source On-State Resistance	R _{DS(ON)}	I _D =1A, V _{GS} =10V	-	150	-	mΩ
		I _D =1A, V _{GS} =4.5V	-	200	-	mΩ
Gate-Source Resistance	R _{gs}		-	100	-	kΩ
Gate Resistance1	R _{g(1)}		-	1.5	-	kΩ
Gate Resistance2	R _{g(2)}		-	500	-	Ω
Input Capacitance	C _{iss}	V _{DS} =10V, V _{GS} =0V, f=1MHz	-	20	-	pF
Output Capacitance	C _{oss}		-	55	-	pF
Switching Time	t _{on}	V _{DD} =30V, I _D =1A	-	2.8	-	μs
	t _{off}	V _{GS} =0~10V	-	0.8	-	μs

INKA214AP1







Active Clamp
Silicon N-channel MOSFET

TYPICAL CHARACTERISTICS

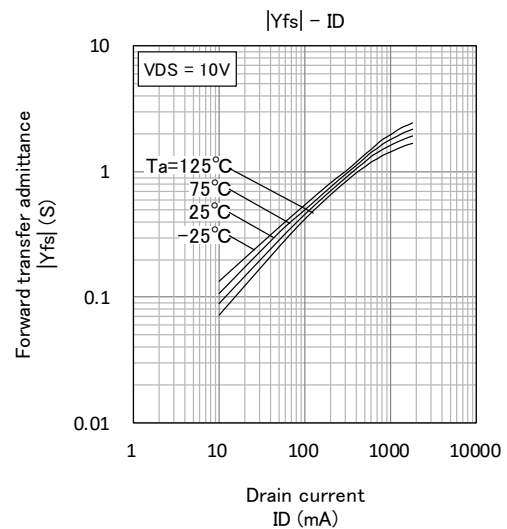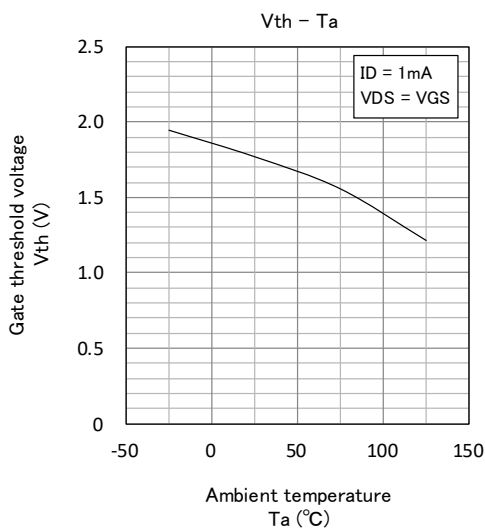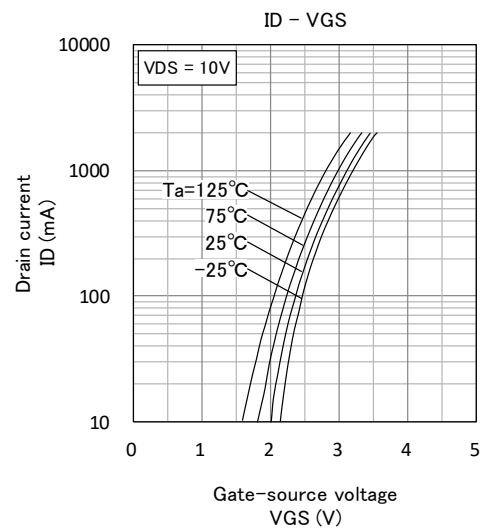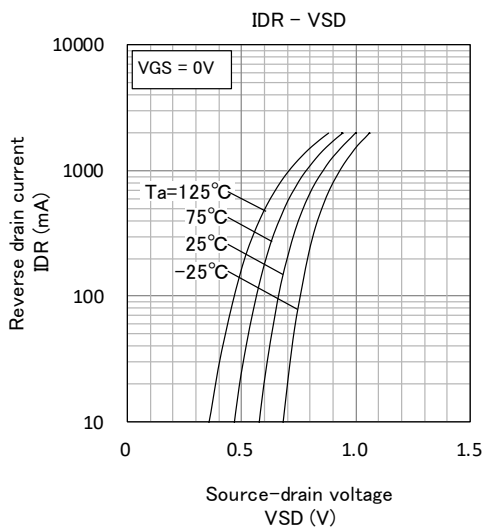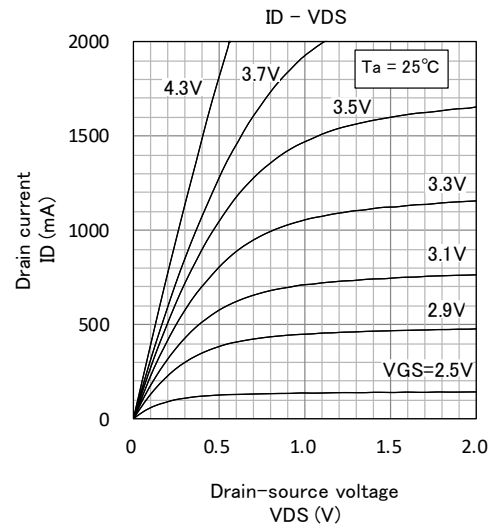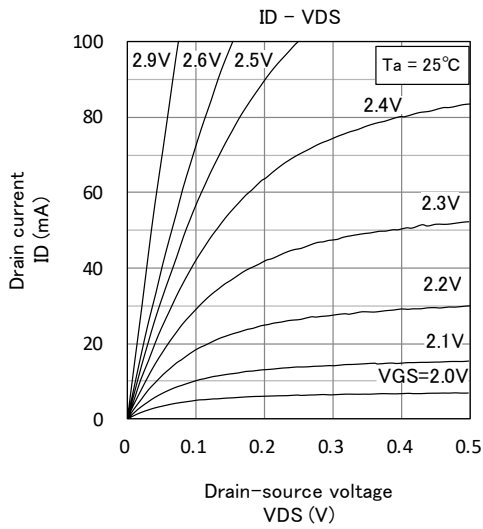




INKA214AP1

Active Clamp
Silicon N-channel MOSFET

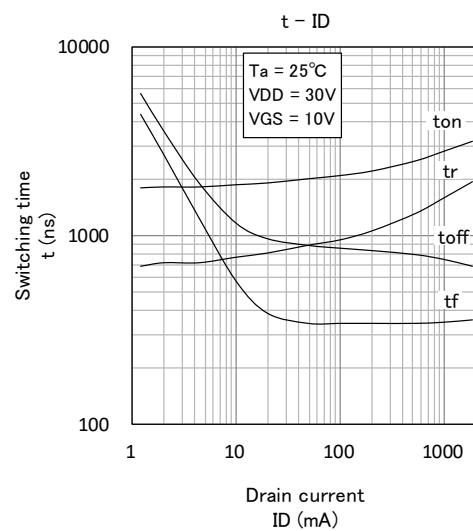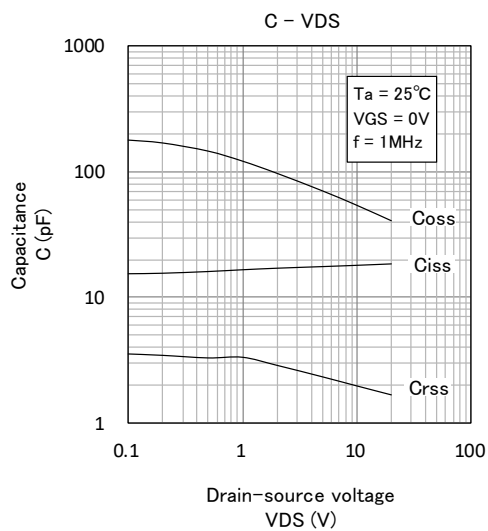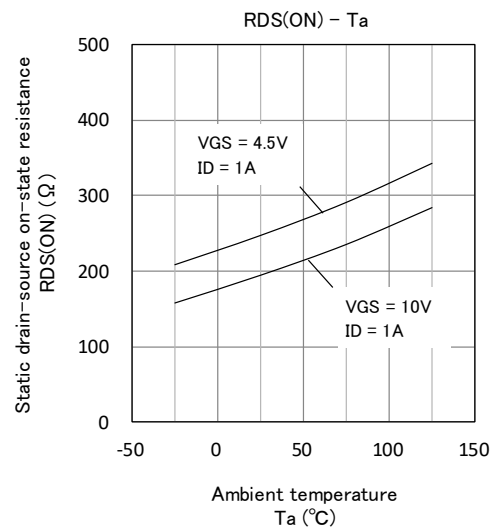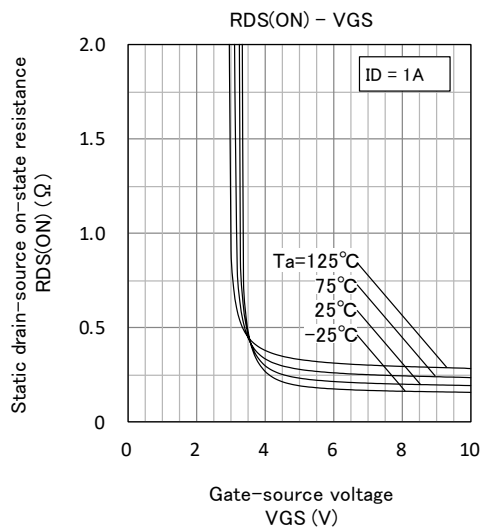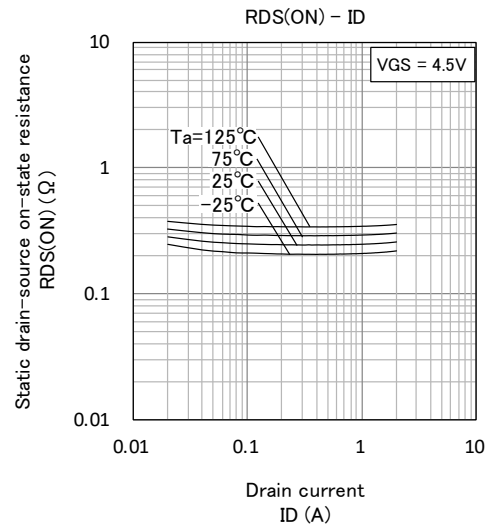
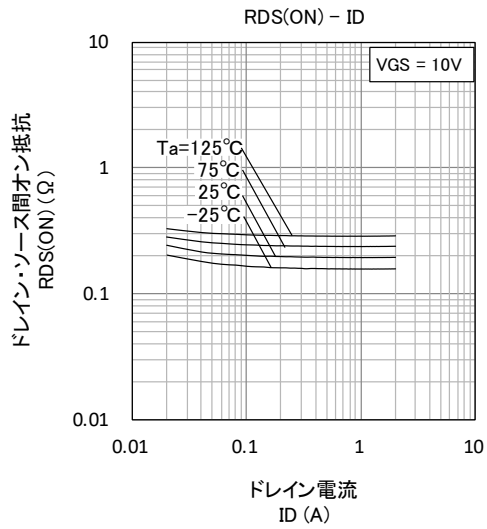


INKA214AP1

Active Clamp
Silicon N-channel MOSFET

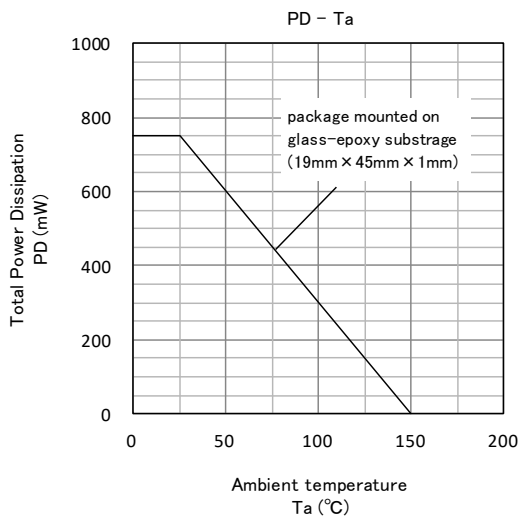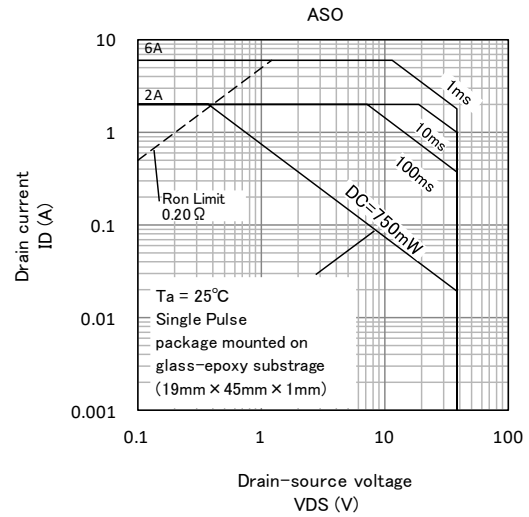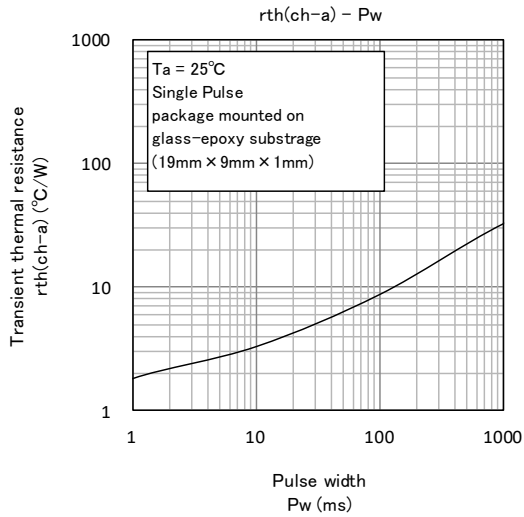

Switching time test condition

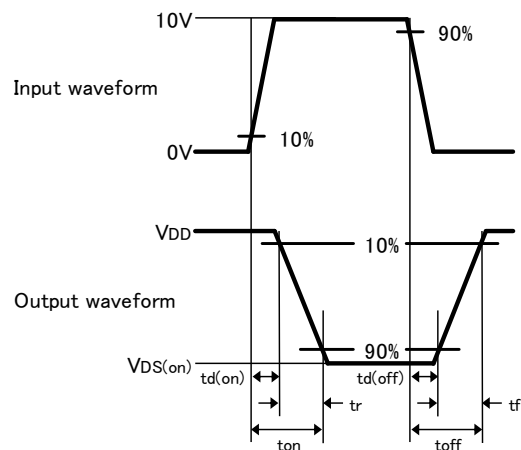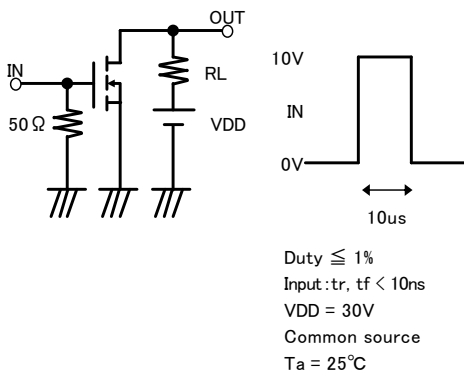

Keep safety first in your circuit designs!

·ISAHAYA Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1) placement of substitutive, auxiliary, (2) use of non-flammable material or (3) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to our customers in the selection of the ISAHAYA products best suited to the customer's application; they don't convey any license under any intellectual property rights, or any other rights, belonging ISAHAYA or third party.
- ISAHAYA Electronics Corporation assumes no responsibility for any damage, or infringement of any third party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by ISAHAYA Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for the latest product information before purchasing product listed herein.
- ISAHAYA Electronics Corporation products are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of ISAHAYA Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact ISAHAYA Electronics Corporation or authorized ISAHAYA products distributor for further details on these materials or the products contained therein.